


Standard 100mm thick asphalt footpath
(Suitable for Central City & Docklands area or as approved)

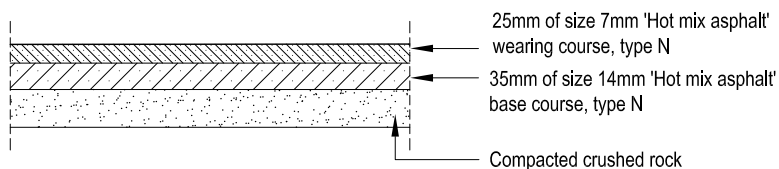

Standard 60mm thick asphalt footpath for outside the Central City area
(Suitable for areas of the municipality outside of the Central City & Docklands or as approved)

Asphalt paving is the standard footpath pavement treatment throughout the municipality.

Asphalt paving is often used in less active areas of the municipality or as an interim treatment when resources are limited. Bluestone paving is the preferred permanent treatment for footpaths within the Central City and selected key areas in the Docklands.

Asphalt finishes should be consistent in appearance and be level and flush with existing pavement surfaces.

For typical construction details, refer to City of Melbourne, Engineering Standard Drawing:
Footpath pavement construction details
Dwg No. 1P 50405B.