

Elevation




The steel safety rail fence is used in selected footpaths throughout the municipality where there is a need for a barrier to control pedestrian movement. Examples include selected major intersections, entrances to major facilities or where there is a significant level change at the kerb line.

The safety rail fence is set back from the kerb line a minimum of 600mm.

The posts and fence panels are fabricated in mild steel and powder coated in Dulux ' Silver Glow Pearl' 84623.

For fabrication & installation details, refer to City of Melbourne, Engineering Standard Drawing.

1P 50514 Pedestrian Safety Fence (Federation Style)

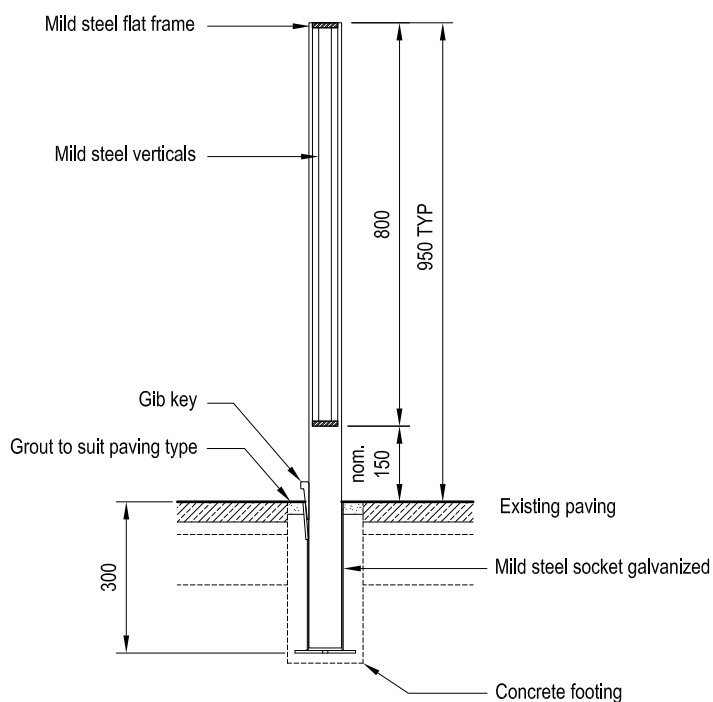

Section