


Elevation



Plan

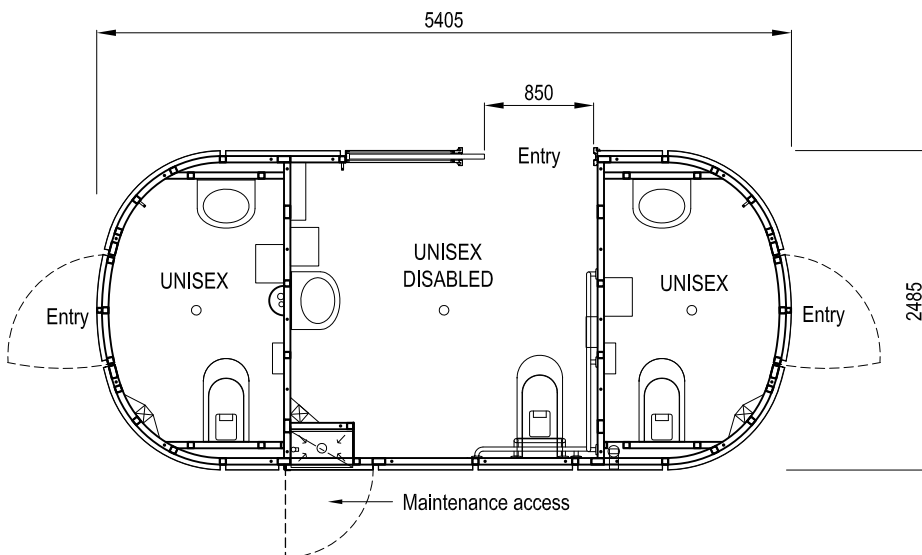

The park toilet is used in parks & gardens throughout the municipality.

The toilets must be placed adjacent to streets in accordance with the City of Melbourne toilet strategy.

The park toilet has two ambulant pans and one disabled.

Toilet walls are fabricated using a galvanised steel frame with grade 316 stainless steel sheet lining to the exterior & interior faces. The roof is also fabricated using a galvanised steel frame with grade 316 stainless steel sheet lining to the exterior. The floor structure is a reinforced concrete slab.

For fabrication & installation drawings, refer to City of Melbourne, City Design drawings; Project No: 902630_F01-19_Park Toilet