



The Docklands light is to be used within pedestrian areas on the waterfront but may also be appropriate for other locations in the municipality.


The light is available as a single or double luminaire and is normally positioned at 12-15 metre centres. The placement of lights should be carried out in consultation with a specialist lighting engineer to ensure the relevant lighting standards are met.

The light can be mounted flush with the pavement or on a pedestal. Mounting details should be determined in consultation with a structural engineer.

Light poles must not obstruct pedestrian paths of travel or passengers exiting from on-street parked vehicles.

The poles are tapered spun aluminium with a powder coat finish, Dulux 'Silver Glow Pearl' 84623. The reflectors are moulded fibre glass with a white gel coat finish.

For fabrication & installation drawings, refer to City of Melbourne, City Design drawings; Project No: 901612 - Docklands Light

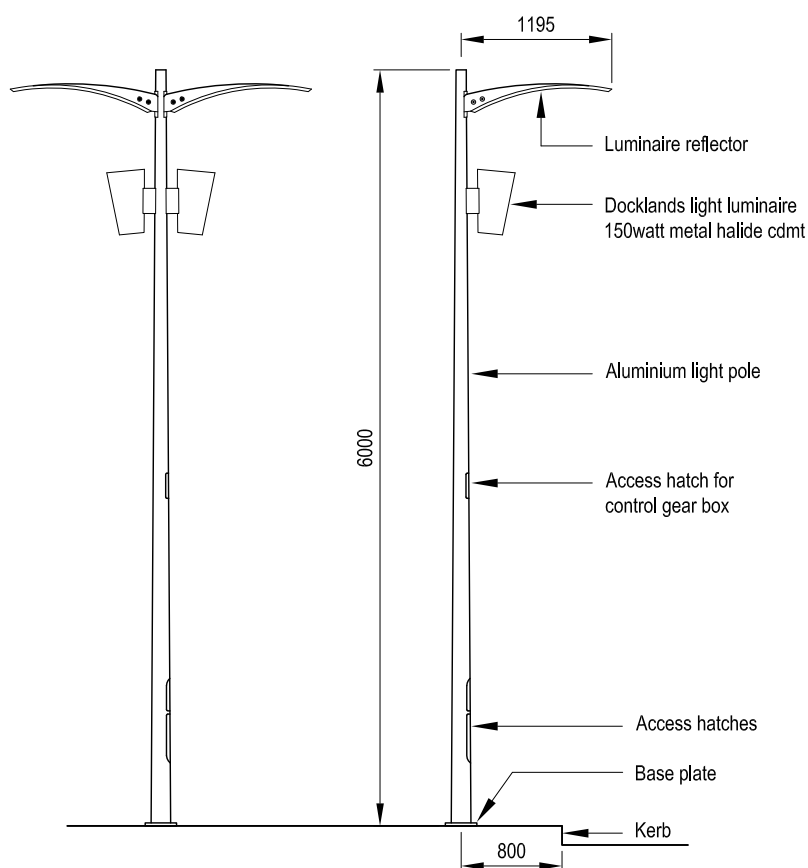

Elevations