


Elevation

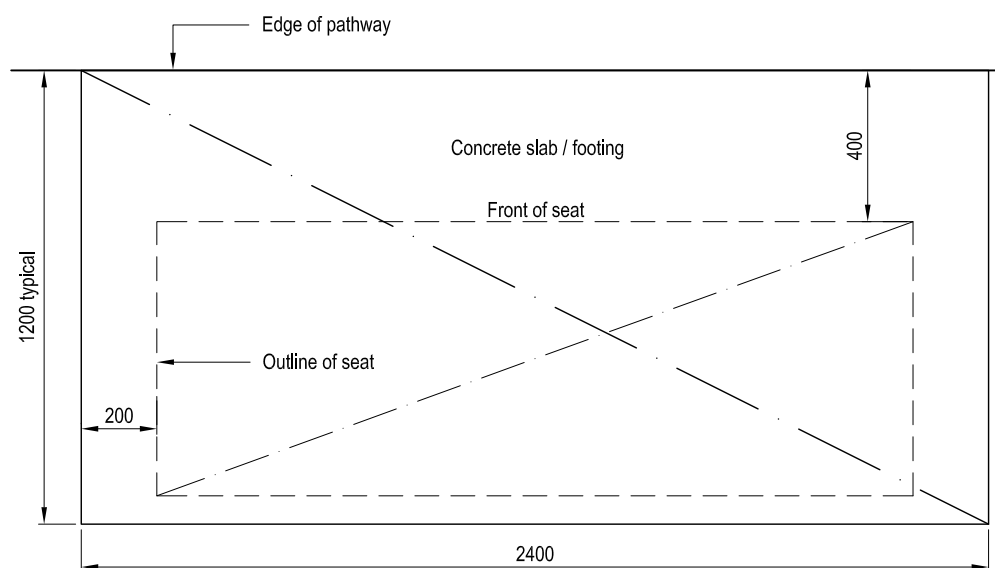

Plan

The Park seat is used in parks & gardens throughout the Central City & Docklands.

The seat should be located adjacent to and aligned with pedestrian paths in a mixture of sunny and shaded locations. Seats should be positioned so that they face away from nearby structures.

For seats located within Docklands, the seat frame is to be fabricated from grade 316 stainless steel, elsewhere the frame is to be fabricated from mild steel and then powder coated, Dulux 'Deep Brunswick Green' 6134G.

Concrete slab to be 'Charcoal' coloured, achieved by adding 15kg/m³ black oxide 'Bayer 318', or approved equal, to concrete mix prior to pouring.

Concrete slab must be placed flush with adjoining grades for ease of access and mowing.

For fabrication & installation drawings, refer to City of Melbourne, City Design drawings; Project No: 5068 - Park Bench Seat