


Typical section

Sawn bluestone paving is the standard footpath treatment used throughout the Central City and selected high use areas in Docklands.

The standard size paving unit is 995 x 495 x 40mm, with a sawn finish and a 2mm chamfer to edges. Pavers are laid in a stretcher bond pattern in a 1000 x 500mm module perpendicular to kerb.

The paving should provide a consistent finish and be level & flush with existing pavement surfaces.

For typical construction details, refer to City of Melbourne, Engineering Standard Drawing:
Bluestone paving construction details
Dwg No. 1P 50402.

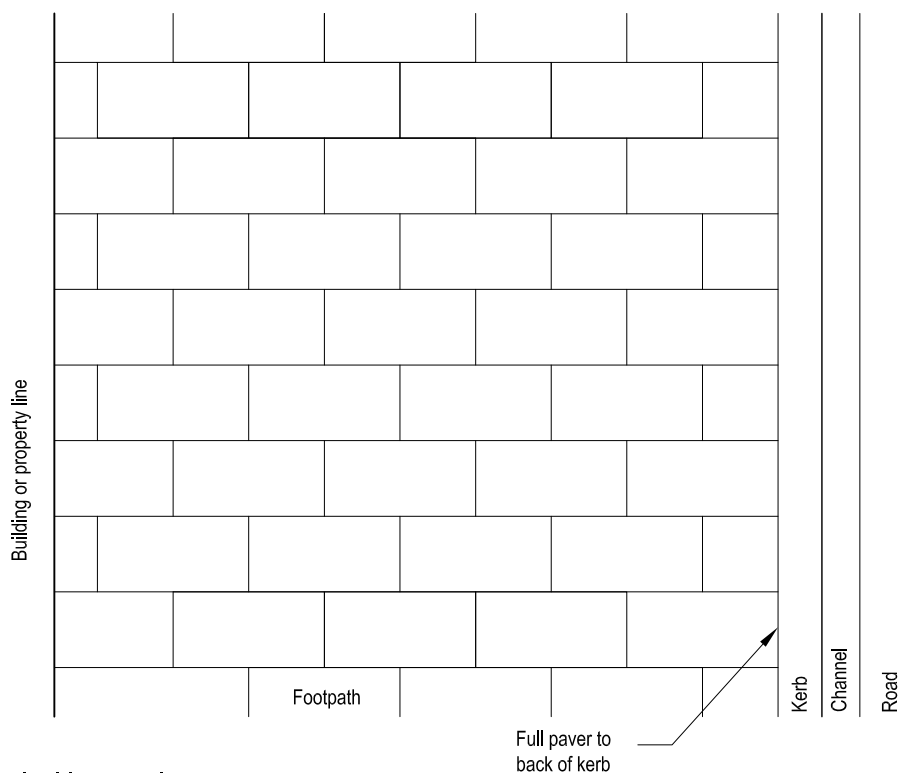

Typical layout plan